App.F.IX-1

1924-25

File No. 51-24

Previous References.

Serial Nos. 58/66

Ft 51-24 (1-19, 21, 24, 26, 28)

" 48-20 (56, 59)

" 93-10 (1-15) ; Ft 97-21 (10-27)

Later references.

Ft 42-26 (1 & 2, 5-8, 10-14, 16-35, 38 & 39)

GENERAL AND REVENUE SECRETARIAT.

Serial Nos.

Part B for

SUBJECT

Settlement of the Mysore - South - Kanara Boundary

Dc 3076 dt 6.11.25 Conservator of Fts with refce to sl 58. states that action has to be taken to clear the boundary line accurately

382 (1)

G. R. S. III—1] 1925

GENERAL AND REVENUE SECRETARIAT.

71-

NOTES.

File No. 51-24

FILE HEADING.

Settlement of the Mysore-South Kanara Boundary.

From

The Superintendent, Revenue Survey

No. 11 Dated 14.7.1925 Received 18.7.25

Diary No. 382	Enclos.	Spare Copies.	Serial No. 58.

BRIEF ABSTRACT OF LETTER.

Forwards the final report of Messrs R.B. Narasimha Iyengar, V. Shankar Rao & members of the Mysore-South Kanara Boundary Commission and suggests the issue of suitable instructions to the Conservator for preserving the boundary line and the cairns.

NOTES AND ORDERS.

Submitted for perusal in the first instance. The circumstances under which this Survey was undertaken are explained in my Dy. No. 1 note of 2nd June 1915 - put up herewith.

2 The case will be put up for orders again after looking into the previous papers on the subject.

16.7.25

WD 1881—GPB—30,000—1-8-21

NOTES—First Sheet.

Y

Subt for perusal.

Rev 6/7

WD 20/7

Serial No

4 The manner in which this file has been put up is very unsatisfactory

5 Please put up at once the order directing the settlement of the boundary dispute. When it is disposed of we may ~~[illegible]~~ ~~[illegible]~~ ~~[illegible]~~

WL 2119—G 5b - 10,000 - 7-1-25

G.R.S. III-2]

General and Revenue Secretariat.

71 File No. 51 of 1924

Serial No

the work done [illegible] with the work [illegible] to be done [illegible] [illegible]

11 The boundary line was first demarcated and finally settled throughout its length in 1881. but owing to the difficulty of identifying it, an officer of the Revenue Dept. & one Chokkanna was deputed to demarcate the boundary in conjunction with an officer of the Madras Govt. They identified a major portion of it and did not agree with each other regarding certain portions of it. Mr. Chokkanna was again posted for this work to be done with the help of a new Madras officer - Mr. The Depn. later was not successful again. Hence after [illegible] an Arbitrator [illegible] - Mr. [illegible] appointed and the boundary work was later on [illegible].

12 Mr. T. Hanumantha Rao was the first officer appointed for the work after the arbitrator was settled. He demarcated about 85 miles during the seasons 1921 and 1922 and Mr. R. A. Nana, [illegible] did about 150 Miles - thus Completing the whole area.

vide page 61 of this Basic Code.

1904 - 1906.

page 27 of this printed Code

page 57 of this Basic Code.

1911.

vide decision of Govt. of this Revenue Dept. dated and 71-164 11-10

71-48-20 59
71-97-21-27

awards for this Survey

NOTE—Contn. Sheet

Serial No

Fr. 164-11-3

13 There is no further work to be done.

14 The Resident's letter of 18.7.1924 gives an account of the work done up to that date.

15 The points for orders is whether the C.F. may be instructed to preserve the line of boundary and carries as suggested by the Survey Superintendent in his letter of 14.7.24

16 Submitted for orders with regard to the [redacted] letter of 5th January 1920.

14.3.8.25

5.8.25

Rev Fr

Fr. 164-11-10 (W).

Submitted to perusal & orders (Ref Para 4) —

Rev Fr 5/8

1st The report is for perusal.

A similar copy of the report may be sent to the Govt of Madras also.

19 As this closes a long-pending question, a D.O. may perhaps be put up —

20 Orders seem to be necessary as regards the maintenance of the boundary. That however is a matter to be attended to by the Govt. & any arrangements that may be adopted has to be adopted in consultation with the Govt of Madras

21 This may be submitted to Dewan

15/8

DEWAN'S OFFICE. Rec'd 18. AUG. 1925 Reg. No. 1562

NOTE—Contn. Sheet

3/13 11.8

1st Fr

Serial No

DEWAN'S OFFICE,
RECD. ON 25 SEP 1925
Reg. No. 2610

Note—Contn. Sheet

Submitted to His Highness.

These papers relate to the long standing question of the satisfactory settlement of the Mysore-South Canara boundary and its demarcation on the ground. The final report has been received and the long correspondence has terminated at last; and it may be interesting to review the history of the question from the beginning. So far back as in the year 1870-71, a dispute arose as to the proper boundary line between Mysore and Canara on the Manjarabad frontier in connection with our right to grant a patta to a European planter for certain lands in the slopes of the Bhund Ghat in Manjarabad Taluk, Hassan District. As the question was involved in doubt and it was desirable to settle the boundary line, our Government and the Government of Madras appointed a joint Commission for the settlement of the boundary in 1881, Mr. J. Sturrock representing Madras Government and Captain A.H. Macintire, Mysore. They settled the whole length of the boundary line -- over two hundred miles -- in a difficult country; and erected cairns at long intervals on the boundary line, for purposes of demarcation.

2. The line was not, however, actually laid down on the ground, and in the course of a few years, the cairns that had been erected had gone out of repair and partly disappeared. In 1900, when the Survey of India Department was about to commence operations for the survey of the Forest Reserves of South Canara they found it difficult to identify the boundary line and it was found necessary to have the boundary line more fully demarcated on the ground.

3. After a lengthy correspondence, two Commissioners, Mr. Doig representing Madras Government and Mr. T. Chokkanna representing our Government, were deputed in 1904 to demarcate the boundary as settled in 1881. The boundary line as settled by

the Commission of 1881 had been entered on a tracing prepared by the Topographical Survey Department and had also been described in a descriptive memorandum. The instructions to the representatives were (1) to demarcate the boundary line in so far as both would agree to it and (2) to reserve such bits, if any, about which they could not arrive at an agreement. Messrs. Doig and Chokkanna identified and demarcated the whole length of the boundary except eleven bits involving a length of about 20 miles, about which they could not agree. The disagreement was chiefly due to the varying degrees of importance they attached to the tracing and the descriptive memo, left by the Commission of 1881.

4. This joint identification of the boundary was accepted by both the Governments except as regards the eleven reserved bits. The boundary line -- such portion as was demarcated -- was to be maintained by this Government in the first instance, the cost being borne in equal shares by both the Governments. - Triennial inspections were to be held by officers deputed by bot the Governments. This arrangement was effected in 1907.

5. The first inspection took place in 1910. In view of the difficulty in identifying the boundary in places, a joint Commission was again deputed in 1912 to supplement and to render - more accurate the description of the boundary, as given in the previous report of 1905-06. Mr. Barry represented Madras Government and Mr. T.Chokkanna, our Government; they could not come to an agreement.

6. In view of these circumstances, the Government of Madras suggested in 1912 that the Government of India might be requested to depute an officer of the Survey of India to determine and survey the whole of the boundary line as settled by the Commissioners of 1881 with general instructions to accept as correct the line agreed on by Messrs. Doig and Chokkanna in 1905-06, where that line could be determined with certainty. Each Government was to appoint its representative to represent its interests before - the Survey Officer in question whose decision was to be accepted as

Record of Cases submitted for the Orders of His Highness the Maharaja



Subject.

Final report on the settlement of the Mysore-South Canara boundary dispute.

Order.

~~KRW~~

8/10/25

Revsy

~~Oct.~~ 1925

(26) 1662 90

[App. F. III—2

General and Revenue Secretariat | 9)(— File No. | of 1925

Serial No 65(a)

From the Officer in Charge Nilgiris Settlement

No. 2418 & 17-8-25

Forwards a copy of the report of work done during 1924-25 with enclosures.

Subd. Mr. R. A. Narasimhaiyar, our Representative before the Arbitrator, having already sent his report, it has been subd ~~to the~~ with a D.S.-R for H. H's perusal-

on the return of the file, the question of maintenance of the boundary line & the clearing thereof annually, will have to be taken up.

Mr 26.9.25 Subd for final-

Rev Mr 28/9

Mr. Morton commends the good work done by Mr. R. A Narasimhaiyar

Mr. member 2.10.25

Please submit to Dewan

Dewan Sec to Dewan 3/10

Mr. 17/10 DS. P.S.D 13/10/25.

4/10

17.

61/3.10

DEWAN'S OFFICE.
RECD. 4 OCT. 1925
Reg. No. 2771

Note—Contn. Sheet

1662 /

[App. F. III—2

General and Revenue Secretariat

H- File No. 51 of 1924

Serial No

Brought forward
W.L. 12-10-25 to Govt for appl (Hyd Govt's minute in Para 22)
R Sec'y
WP 12/10/25
Issued 13/10 WP 13/10

66 To

The Chief Engr of Hyd
Memo No 3026 of 6/11

In forwarding copy of the Final Report on the settlement of the Nizam-Sou'h Canara boundary together with a descriptive memo. I am directed to request the arbitrator & the Representatives of the Govt of Madras and Nizam, that action may be taken to clear the boundary line accurately & request to submit estimate of cost for actual clearing of the line & preservation without obliteration.

B Hyd

GEN. & REV. SECRETARIAT
9-NOV 1925
INDUSTRIES & COMMERCE BRANCH.

Note—Contn. Sheet

(1)

No. 11 One Three only

Office of the Superintendent,
Mysore Revenue Survey,
Dated, Bangalore 14th July 1925.

03070 GEN. & REV. SECRETARIAT
18 JUL 1925
INDUSTRIES & COMMERCE BRANCH.

9+c

D 382

From

D. Srinivasa Iyengar, Esq., B.A.,
Superintendent, Revenue Survey & Settlement in Mysore.

GEN. & REV. SECTT. 17 JUL 1925 G. D. SECTION

To

Fr. S1-24-58

B. Nagappa, Esq., Bar-at-Law.,
Secretary to Government, Revenue Department.

Sir,

I have the honour to forward herewith the final report of Messrs. R.A. Narasimha Iyengar, H. Sankara Rao and F.W. Morton of the Mysore South Kanara Boundary Commission, and to suggest the issue of suitable instructions to the Conservator of Forests for preserving the line of boundary and the cairns as suggested in para 7 of the Commissioners' report.

I have the honour to be,

Sir,

Your most obedient servant,

D. Srinivasa Iyengar
Superintendent

15/7/25

2

Report on the settlement of the Boundary between Mysore and South Kanara.

Season 1924-1925.

JK-168-11-3.

The Settlement and demarcation of the boundary line was continued from cairn No.369 of season 1921-22 and carried out in accordance with letter No.812-B/12-2 dated 16th July 1912, from the Secretary to the Government of Madras, Revenue Department, to the Honourable the Resident in Mysore.

2. The following Officers met at the Mala ghat road on the 21st November 1924:--

Mr. R. A. Narasimha Iyengar representing Mysore Government.

Mr. H. Sankara Rao representing Madras Government.

Mr. V. W. Morton, Survey of India Officer.

3. The field work was commenced the following day under rather trying conditions, the country having been infested with leeches, which were a great source of trouble to all and continued to be so till the end of December.

4. The clearing, settlement and demarcation of the whole of the remaining line, inclusive of the Hannar Magane enclave, a distance of about 130 miles, as measured from the 1" modern maps, was completed on the 20th April 1925, the survey taking a month longer for reasons stated in paragraph 5. The greatest difficulty was experienced in settling and demarcating the line from Agumbe to Hyderghat ghat, a distance of about 25 miles, owing to dense and unfrequented jungle, over hills of varying altitudes along which the boundary passed.

5. The health of the Party for the first three months was satisfactory; but during the months of March, April and May, the whole staff suffered from malarial fever. Surveyor C. Govinda Raj fell ill about the middle of March

and

and as he was pronounced medically unfit after undergoing treatment in the Tirthahalli hospital, another Surveyor had to be requisitioned for from No. 7 Party, and about a month elapsed before the relief could join duty. Even with this help, though late in the season, but for the untiring exertions and hard work of Surveyor Mokham Chand, who had been employed on the boundary from the very commencement, it would not have been possible forthe survey to be completed this year and we therefore desire that his work may be specially recognised.

6. A descriptive memorandum of the boundary, as settled during the season, is attached to this report. The tracing and 'Vandyke' prints are under preparation and will be submitted to the respective Governments, in due course, by the Director, Southern Circle, Survey of India

7. There should be no difficulty in identifying the boundary with the help of the 'Vandyke' prints, in conjunction with the descriptive memorandum which has been prepared, so as to incorporate every detail on the ground. It is particularly requested that owing to heavy rainfall on the western ghats and consequent rapid tree growth, the line be cleared annually in order to avoid its obliteration.

Ry Narasimha Aiyangar.
Asst Commissioner, Mysore Survey

H. Sankara Rao.
Dy Collector, Madras.

F. W. Morton. Supdt
Survey of India
8. 6. 25.

Pol. 334 (4)

My thanks are due to the Mysore Forest Department for the services of two guards throughout the season to supervise the line clearing.

24-57-24-65 (9)

I have the honour to be,

Sir,

Your most obedient servant,



1662

Forwarded.

Lt: Col. R.E.,
Director, Southern Circle
Survey of India.

E. A. Morton.

E. A. *Superintendent.*
Survey of India
On deputation.

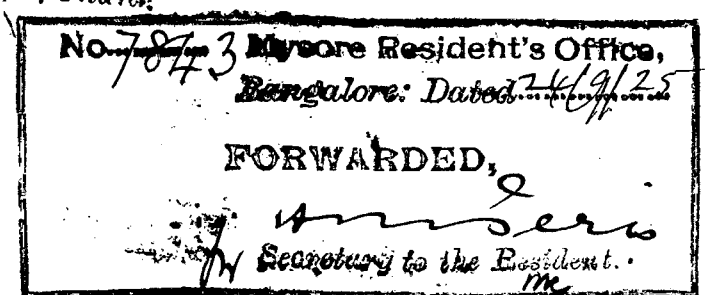

5 342

OFFICE OF MYSORE SOUTH KANARA BOUNDARY SETTLEMENT

No. 241 Bangalore 17th August 1925.

1662/1946

From

The Officer in charge,
Mysore South Kanara Boundary Settlement

Thro'

The Hon'ble the Resident in Mysore
and
The Director, Southern Circle,
Survey of India, Bangalore.

21/9/25

To

The Chief Secretary,
to the Government of Mysore.

7044
16.9.25

Sir,

I have the honour to forward herewith the following papers and maps.-

1. Report on the settlement of the boundary between Mysore and South Kanara, season 1924-25.

2. Descriptive memorandum of the Main Frontier Line from cairn No.369 to cairn No.1180 on Yedamale Gudda at the trijunction of Bombay, Madras and Mysore.

3. Descriptive memorandum of the Hannār Magane or Coondapoor enclave.

4. One copy of the actual horizontal distances of Main Frontier Line and Hannār Magane as measured from the Original 4-inch plane-table sections.

5. 2 Copies of new Index to 4-inch sheets and traces of Mysore South Kanara Boundary from the trijunction of Coorg, Madras and Mysore to the trijunction of Bombay, Madras and Mysore.

6. (12) Sets of vandyke prints of boundary line surveyed during season 1924-25.

2 sets

All the above papers and maps are also being despatched direct to the Government of Madras.

It must be noted that vandyke print sheet No.25, submitted in 1923, should be now numbered sheet No.25 A to be in accordance with the new Index.

In conclusion I desire to bring to the notice of the Government the great assistance rendered me by Mr.R.A. Narasimha Aiyangar, Assistant Commissioner, on special duty, in the final settlement of the boundary this season.

My.

6

O. 145.

Original.

Survey of India,

OFFICE OF THE Director, Southern Circle

Receipt No. ....., *dated* September 1925.

7044 *Despatched to* .....

76-9-25 The Chief Secretary to the Govt. of Mysore

5-29-08 thro' the Hon'ble the Resident in Mysore

Per .....

Vide his ..... *No.* ....., *dated* ..... 192 .

Description.	Scale.	No. of copies.	Remarks.
Vandyke prints of Mysore Sanki Kanara Boundary line Surveyed during Season 1924-25:-			
Sheet Nos. 1 and 2 (Combined).	4" = 1 mile	2	
" No. 2	"	2	
" " 3	"	2	
" Nos. 5 and 6 (Combined)	"	2	
" " 9 and 10 (Combined)	"	2	
" No. 13.	"	2	
" No. 15.	"	2	
" No. 17.	"	2	
" No. 19.	"	2	
" No. 21.	"	2	
" No. 23.	"	2	
" No. 25. B.	"	2	
New Index to 4" Sheets and tracing of Mysore Sanki Kanara Boundary		2	
	Total	26 Copies.	

To be retained

Reg. No. 441, S. I. O.—16-7-24.—5,000.

O. 145.

Triplicate.

Survey of India,

OFFICE OF THE [illegible]

Receipt No. ..... *, dated* ..... *192* .

Despatched to .....

.....

At Thro' The Hon'ble the Resident in Mysore.

Per .....

Vide his ..... *No.* ..... *, dated* ..... *192* .

Description.	Scale.	No. of copies.	REMARKS.
Vandyke prints of Mysore Sr. No. Kanara Portion of the Survey during season 1924-25.			
Sheet No. 1a & 2 (Combined)		2	
No. 2		2	
" 3.		2	
No. 4a & 6 (Combined)		2	
" 9 & 10 (Combined)		2	
No. 13.		2	
No. 15.		2	
No. 17.		2	
No. 19.		2	
No. 21.		2	
No. 23.		2	
No. 25 R.		2	
New Index to the Sheet Lines of Mysore Sheet Kanara Portion		2	
	Inches	21	Papers.

To be ~~retained~~. returned duly Signed. "Recd: the above

To

The Director,
South Circle,
Survey of India,
Bangalore.

Reg. No. 501, S. I. O.—13-6-21.—15,000.

Descriptive memorandum of
the Mysore-South Kanara Boundary
season 1924-25.
From South to North.

From cairn No.369, the line goes North up the watershed to cairn No.370 on the highest point of Gadicul Gudda (3906 ft.); thence North West down and along the watershed for about eight chains to cairn No.371; thence along the watershed to cairn No.372 on a saddle; thence West North West along the watershed to cairn No.373; thence North-North-West along the precipitous edge and watershed to cairn No. 374 (3800 ft.); thence North West along the precipitous edge of the ghauts to cairn No.375; thence North North West along the precipitous edge to cairn No.376; thence North West along the precipitous edge to cairn No.377 on the highest point of black rocks; thence past cairn No.378 (3505 ft.) on another black rock about four chains distant, the line goes along the precipitous edge of the ghauts and watershed to cairn No.379; thence along the precipitous edge and watershed up to cairn No.380 on a knoll (3559 ft.); thence North-North-West down the watershed to cairn No.381; thence North West down and along the watershed to cairn No.382; thence the line goes North for about three chains along the watershed and West by a little South for about four chains to cairn No.383; thence West North-West along the watershed to cairn No.384 on a hill-top,

thence the line leaving the watershed runs South West crossing two water-courses for a distance of about 1[illegible] chains and thence it goes South by a little East for about four chains to cairn No.385 at the head of a stream; thence West partly along the above mentioned watercourse and up a spur to the Topographical point of Kuringal (3913 ft.) on which number [illegible] is engraved on a living rock; thence the line goes North by a little East down the watershed, along a narrow rocky ridge to cairn No.387 built round a large [illegible] tree; thence in the same direction down and along the watershed up to cairn No.[illegible] built round a tree on a rocky knoll (3[illegible]3 ft.); thence North-East down and along the watershed to Commissioners' cairn numbered [illegible] to the South of the Mala Ghat road. Thence to cairn No.[illegible] on the Northern side of the Mala Ghat road; thence the line goes North-West along the Watershed past cairn No.[illegible] on a rise to cairn No.[illegible] on the watershed; thence North-North-West along the watershed to cairn No.[illegible]; thence in the same direction along the watershed and precipitous edge to cairn No.394; thence still in the same direction along the watershed to cairn No.395 (3736 ft.) on the precipitous edge; thence also in the same direction along the precipitous edge to cairn No.396. Thence North along the watershed to cairn No.397 on a knoll; thence ~~North~~ in the same line along the watershed to cairn No.[illegible] on the saddle; thence North-North-West

along the watershed and precipitous edge to cairn No.399 (3980 ft.); thence North along watershed to cairn No.4..., thence North-North-West along the watershed to cairn No.401; thence North along the watershed and precipitous edge to cairn No.402 on a knoll (3960ft) North of the Mysore (bandh) Survey mark and taluk boundary between Mudgere and Koppa taluks; thence North North West along the watershed and precipitous edge to cairn No.403 on the saddle; thence North West up the watershed and precipitous edge to cairn No.404 (3993 ft.), number being engraved on a living rock at foot of cairn South of the Gangamula road; thence North by a little West along the precipitous edge to cairn No.405; thence North-West along the precipitous edge and watershed to cairn No.406(3929 ft.); thence North by a little West along the watershed to cairn No.407; thence in the same direction, along the watershed to cairn No.408(3849 ft.); thence North along the watershed to cairn No.409 near a Mysore survey mark; thence North by West along the watershed and West of a foot-path to cairn No.410 built round a tree on the highest point of a knoll(3703 ft.); thence North-West along the watershed leaving the foot-path to cairn No.411 on saddle; thence North-North-West along the watershed to cairn No.412; thence North-West down the watershed and precipitous edge to cairn No.413 at the end of a rise; thence North

North-West, down and along the precipitous edge to cairn No.414 on a knoll; thence West-North-West along the precipitous edge and watershed to cairn No.415, thence North by a little West in a straight line across two small watercourses to cairn No.416 (both cairns being intervisible); thence North-North-west down the watershed to cairn No.417 in a small watercourse; thence in the same direction up to cairn No.418(2[illegible] ft.) on the watershed at the northern edge of a knoll; thence still in the same direction down the watershed to Commissioners' cairn numbered 419 on a small rise on the northern side of the old Tullur Ghat road. From cairn No.[illegible], the line goes North North-West along the watershed to cairn No.420 on a knoll; thence East North-East along the watershed to cairn No.421 on the saddle at the turn; thence North by a little west along the watershed to cairn No.[illegible] (2[illegible] ft.) on a small rise, thence West-North-West along the watershed and through a clearing partly along a foot-path to cairn No.[illegible], number engraved on a living rock; thence West by a little North up the watershed to cairn No.424, South of Tucaguddé (3009 ft.), thence West by a little South in a straight line to cairn No.425; thence West-South-West along the watershed and across a foot-path to cairn No.426(2665 ft. thence South-South-West along the watershed to cairn No.427; thence West by a little South along the watershed to cairn

No.428; thence West-North-West along the watershed and precipitous edge to cairn No.429(2556 ft.) on a rise; thence West-South-West along the precipitous edge and watershed to cairn No.430 also on a rise; thence West by a little North along the watershed to cairn No.431 on another small rise; thence West-South-West along the watershed to cairn No.432; thence South-West along the watershed to cairn No.433 (2661 ft.); thence West along the watershed to cairn No.434 on the western side of foot-path connecting the village of Kervase (S.Kanara) and Heggan-tota (Mysore); thence West by a little North along the watershed to cairn No.435 on the precipitous edge, forming the Forest Survey hill Trigonometrical point of Punjal gudda (3009 Ft thence North along the precipitous edge to the Commissioners' cairn numbered 436 forming the topo station of Anekal gudda (3009 ft.) near a Mysore survey mark. From Anekal gudda, the line goes North-North-West down the watershed and through a clearing to cairn No.437, number and M.S.K. engraved on living rock at end of clearing and North of Mysore survey mark; thence North-West along the precipitous edge to cairn No.438 (2825 ft.) on a cluster of black rocks, with number and M.S.K. engraved thereon; thence in the same direction along the precipitous edge to cairn No.439 on a black rock, number and M.S.K. engraved thereon; thence North-West in

a straight line along the precipitous edge to cairn No. 44[illegible] on the highest point of a grass hill; thence North West along the precipitous edge to cairn No.44[illegible] (2835 ft.) on a hill called Kalkerrittode gudda; thence North-North-West along the precipitous edge to cairn No.44[illegible](2[illegible] ft.), thence North by West along the precipitous edge to cairn No.44[illegible] (2691 ft.), thence North by a little West along the precipitous edge to cairn No.44[illegible](2[illegible] ft.); thence a little North-North-West along the precipitous edge and watershed to cairn No.445(2[illegible]7 ft) on a small rise; thence North by a little West along the watershed to cairn No.44[illegible] (2736 ft.); thence in the same direction along the watershed to cairn No.447(2[illegible] ft.); thence North West in a straight line to cairn No.448 on the precipitous edge; thence ~~North West~~ in the same direction along the precipitous edge to cairn No.44[illegible] on edge, thence in the same direction along the precipitous edge and across a water course to cairn No.45[illegible] (2696 ft.) - one and half chains South of the point where the foot-path connecting AndarChouki (Kanara) with the hamlet of Kudaba (Mysore) common, known as the Andar ghat road meets the boundary number and I.G.L. engraved on living rock at foot of cairn; thence in the same direction along the precipitous edge to cairn No.[illegible](2[illegible] ft.); thence North-North West along the precipitous edge to cairn No.45[illegible] West of the under-mentioned ghat road; thence North-East generally along the above mentioned ghat road and precipitous edge to cairn No.45[illegible](2[illegible] ft.) on the watershed; thence the line leaving

the watershed to the right goes down a spur in the North-North-West direction crossing the said ghat road to cairn 454; thence North-North-West across a watercourse through a clearing to cairn No.455 on the watershed; thence North up the watershed to cairn No.456, number and M.S.K. engraved on living rock; thence North by West up the watershed to the Great Trigonometrical Station of Walkunji (3408 ft.) cairn No.457 (Commissioners' cairn); thence the line runs a little North of East down the grassy watershed to cairn No.458; thence East-North-East down the grassy watershed and partly through clearing to cairn No.459 built round a tree; thence North-North-East along the watershed and through a clearing to cairn No.460(2806 ft.) amongst black rocks, number and M.S.K. engraved thereon; thence North-East along the watershed to cairn No.461; thence North by a little East along the watershed to cairn No.462; thence in the same direction along the watershed and precipitous edge to cairn No.463, number and M.S.K. engraved on living rock; thence North-North-West along the watershed and precipitous edge to cairn No.464 amidst black rocks, number and M.S.K. engraved on living rock at foot of cairn; thence the line goes a little North by West for about 15½ chains along the watershed and precipitous edge to a rise and thence turns East still along the watershed to the Commissioners' cairn numbered

465 (2950 ft). From here, the line turns East-South-East along the watershed to cairn No.466 on a small rise, a little East of Mysore survey marks; thence East North East along the watershed to cairn No.467 on another small rise; thence South-East along the watershed to cairn No.468(2884 ft.) amongst black rocks; number and M.S.K. engraved thereon; thence North-East along the watershed to cairn No.469 among black rocks, number and M.S.K. engraved on living rock; thence South-East along the watershed and through a clearing to cairn No.470 among black rocks, number and M.S.K. engraved thereon; thence East-South-East along the watershed and through a clearing and up the grassy watershed to cairn No.471 (2850 ft.) on a rise about three chains East of the ghat road connecting Kabbinale (S.Kanara) with Mudaba (Mysore); thence North-East up along the grass-covered watershed to cairn No.472.

Thence the line runs North-North-East along the watershed to cairn No.473, number and M.S.K. engraved on living rock; thence a little North of East along the watershed meeting a foot-path at about seven chains distant and thence along the foot-path and watershed to cairn No.474 on Beged gudda (3344 ft.), thence North-East along the foot-path and watershed for about 7½ chains and thence South East still along the watershed and foot-path to cairn No.475, thence South-East still along the foot-path and watershed to cairn No.476 on a hill top (3295 ft.)

about a chain North of the foot-path. Thence the line goes East down the watershed and meeting the foot-path leaves it at a distance of about four chains and proceeds past a Mysore survey mark along the watershed to cairn No.477 on a knoll; thence North-East down the watershed to cairn No.478 on a saddle; thence North-North-East up along the watershed to cairn No.479; thence East-North-East up the watershed to cairn No.480 on a knoll; thence North East along the watershed to cairn No.481, thence East-North-East up the watershed to cairn No.482 on a knoll; thence East-South-East up the steep watershed to cairn No.483(3507 ft.) on a rocky hill-top, number and M.S.K. engraved on living rock; thence North-North-East along the watershed to cairn No.484 on the top of Bilgal gudda (3538 ft.).

From Bilgal gudda, the line leaving the Watershed goes about 10½ chains North down a spur and thence turns at right angles for about 2½ chains to a Commissioners' cairn numbered 485; thence North-North-East still down the spur to cairn No.486 (3235 ft.) on a rise; thence North-East down the same spur to cairn No.487 at the head of a clearing; thence North down through the clearing across two fairly large watercourses and one small watercourse to a Commissioners' numbered 488 near the precipitous edge of another spur; thence North-East partly over grass and then down through

watershed to cairn No. 504; thence North along the watershed for about 6½ chains to cairn No.505 on a small rise.

Thence the line, leaving the watershed, goes North-West through a clearing across the junction of two watercourses and a small watercourse to cairn No.506 on a spur, thence North-North-West , through clearing, across two watercourses up to cairn No.507 about half a chain below a knoll, . . . number and M.S.K. engraved on living rock; thence North-West down through clearing, across a watercourse, to cairn No.508 on the ~~Southern~~ Eastern slope of a spur. Thence the line goes West for about five chains and thence North-North-West across a small watercourse and up a spur to cairn No.509 South-East of Manakkibelara, thence North-North-West up the spur to cairn No.510 on the top of Manakkibelara (3318 ft) which is situated on the watershed; . . thence North-North-West down the watershed to cairn No.511 on saddle; thence in the same direction along watershed to cairn No.512 on a knoll.

Thence the line runs East-North-East along the watershed to cairn No.513 (3208 ft.) on a rise; thence North along the watershed to cairn No.514 (2977 ft.) on saddle; thence North-North-West along the watershed to cairn No.515 on the top; thence North up the watershed to cairn No.516 (3130 ft.) on a rise; thence North-East

No.527.

Thence the line turns North West down the watershed partly through a clearing to cairn No.528 on a rise, number and M.S.K. engraved on living rock; thence in the same direction along the watershed to cairn No.529 (3391 ft.) on a knoll, number and M.S.K. engraved on living rock; thence North down the watershed to cairn No.530 on the saddle; thence North-East up the watershed to Commissioners' cairn numbered 531 on a knoll, near a Mysore survey mark; thence East-North-East down the watershed to a Commissioners' cairn called Magodu, numbered 532, number and M.S.K. engraved on living rock; thence North East down the watershed to cairn No.533; thence North down the grass-covered watershed to cairn No.534 at the South-East end of a black rocky ridge, number and M.S.K. engraved; thence North-North-East down the watershed partly through a clearing to Commissioners' cairn numbered 535 (2417 ft.) on the saddle below Narasimha Parvat; thence North along the watershed to cairn No.536, number and M.S.K. engraved on living rock; thence North by a little West along the watershed to cairn No.537, number and M.S.K. engraved on living rock; thence East up the watershed to cairn No.538, number and M.S.K. engraved on living rock; thence North up the watershed to

cairn No.539 (2764 ft.), thence North up the watershed to cairn No.540.

From cairn No.540 the line, leaving the watershed, runs West North West to cairn No.541 on a spur number and I.S.K. engraved on living rock; thence in the same direction down the spur and through a clering across one fairly large watercourse and two small watercourses up a spur to Commissioners' cairn numbered 542 (2256 ft.) on Nellikolde over a Mysore survey mark, number and I.S.K. engraved on living rock; thence West down a spur in a straight line through clearing across two watercourses up and over a grass covered spur, thence down across a small watercourse through another clearing, across a watercourse and up the clearing across another watercourse to cairn No.545 (2,55 ft) on Atti Bare, number and I.S.K. engraved on living rock; thence North-West down a spur and through clearing to Commissioners' cairn numbered 544 on the watershed number and M.S.K. engraved on living rock. The line now leaving the watershed runs in a westerly direction for about a chain to cairn No.545 on the head of a clearing, number and I.S.K. engraved on living rock; thence west-North-West down through the clearing, across a watercourse and again the same watercourse in two places to cairn No.546, number and I.S.K. engraved; thence a little west of North through clearing, across a small watercourse to cairn No.547, South of another watercourse; thence

North-West across the afore mentioned watercourse through clearing and across another watercourse to cairn No.548 number and M.S.K. engraved; thence North through clearing across three watercourses to cairn No.549, thence West-South-West through clearing across and then along the same watercourse for a short distance, where the line leaving the after-mentioned watercourse, continues through clearing across another small watercourse to cairn No.550, number and M.S.K. engraved on living rock; thence West North-West through clearing to cairn No.551 on the precipitous edge, South of Curutana gudda, number and M.S.K. engraved; thence through clearing a little South of West along the precipitous edge to cairn No.552 number and M.S.K. engraved; thence West-South-West through clearing and along the precipitous edge to cairn No.553, thence West-North-West through the clearing and along precipitous edge to cairn No.554; thence in the same direction through clearing and along precipitous edge to cairn No.555, thence still in the same direction through clearing and along precipitous edge to cairn No.556.

Thence the line goes in a westerly direction through the clearing and along the precipitous edge to cairn No.557 (2632 ft.), near Mysore survey marks on the top of Emmannkal gudda; thence South-West down through clearing and along precipitous edge to cairn No.558

thence in the same direction through clearing along watershed to cairn No.573.

Thence the line goes North-North-West through clearing and along watershed to cairn No.574 on a rocky ridge; thence in the same direction through clearing along the watershed to cairn No.575 (2685 ft) South-East of Nishani gudda number and M.S.K. engraved on living rock. The line now leaving the watershed runs West-South-West down through clearing across three watercourses to cairn No.576 on a Mysore survey mark; thence in the same direction down through clearing along a watercourse for some distance and across a fairly large watercourse to cairn No.577 to the West of it, number and M.S.K. engraved on living rock; thence North-North-West through clearing and along precipitous edge to cairn No.578,number and M.S.K. engraved on living rock; thence North-West up through clearing to cairn No.579 (2230 ft.) on a grassy knoll at edge of jungle and overlooking the precipitous edge, thence in the same direction down through clearing and along precipitous edge, across a watercourse to cairn No.580 on left bank of a stream number and M.S.K. engraved on living rock; thence North-North-West across the afore mentioned stream through clearing and across another small watercourse to cairn No.581; thence West-North-West down

through clearing across two small water-courses to cairn No.5[illegible] on the left bank of the Patali waterfall, number and L.S.M. engraved on living rock; thence West-North-West across the Patali stream and up through clearing to cairn No.5[illegible]5; thence West-South-West down through clearing, across three fairly large and three small watercourses to cairn No.5[illegible]4 on a spur running in a South East direction from hill-top; thence West by a little South through clearing, across two watercourses and down the precipitous edge in a straight line to cairn No.503 (1349 ft) at the bend of a zigzag of the Agumbe ghat road. Thence the line goes in a North-North-Westerly direction across a watercourse between and along two zig-zags of the ghat road to the chiselled pillars at the higher bend of the ghat road No.5[illegible]6 and M.S.M. engraved on both pillars; thence North by a little West in a straight line through jungle across seven watercourses up to cairn No.5[illegible]7 (2057 ft.) on the precipitous edge, North of the Agumbe ghat road; thence North-North-West through clearing and along precipitous edge, across three watercourses to cairn No.5[illegible]; thence in the same direction through clearing across three small watercourses and along precipitous edge to cairn No.5[illegible]; thence in the same direction through clearing and along precipitous edge, across a small water-course down to cairn No.5[illegible] (1911 ft), South of Vanike Abb (waterfall) number and L.S.M. engraved on living rock; thence

North-West across the Vanike halla through clearing and along precipitous edge, past five watercourses to cairn No.591; thence North-West through clearing and along precipitous edge past two watercourses to cairn No.592, South of Muruganamarada halla, number and M.S.K. engraved on living rock; thence North-North-West across the afore-mentioned watercourse, up through clearing and spur to cairn No.593 (2357 ft.) on a top.

Thence the line runs West by a little South down through clearing to cairn No.594 on a knoll number and M.S.K. engraved on living rock to South of cairn; thence North down through clearing and along precipitous edge to cairn No.595 on the left bank of the Yele halla; thence in the same direction, in a straight line to cairn No.596 on the right bank of the Yela halla. Thence West up through clearing to cairn No.597 on a spur; thence in the same direction, through clearing, across a watercourse up to cairn No.598 on another spur; thence South-West through clearing, across a watercourse to cairn No.599; thence in the same direction through clearing across a watercourse up to cairn No.600; thence South through clearing and along edge to cairn No.601, thence in the same direction through clearing, along edge and across a fairly large watercourse and a small watercourse to cairn No.602(2141 ft.);

precipitous edge; thence North-West through clearing and along precipitous edge to cairn No.615 (2236 ft.); thence in the same direction along precipitous edge across a watercourse to cairn No.61 thence West-North-West (~~Little North~~) along precipitous edge and through clear ing, across two small watercourses to cairn No.617, number and M.S.K. engraved on living rock; thence in the same direc tion along precipitous edge and through clearing across three small watercourses to cairn No.618, thence in the same direction down through clearing and along precipitous edge to cairn No.619 (2200 ft.), thence North-North-East through clearing and along precipitous edge to cairn No.620, on the left bank of the watercourse East of Haddina Bare, M.S.K. also engraved on large rock on right bank of afore-mentioned stream, thence West-North-West up through clear- ing and spur to cairn No.621 on a knoll; thence West through clearing and spur to cairn No.622 (2584 ft.); thence North- West through clearing and along precipit- ous edge to cairn No.623 on the edge South East of Haddina Bare Trigonometrical point; thence North-North-West along precipitous edge and through clearing to cairn No.624 on the Trigonometrical point of Haddina Bare (2647 ft.). Thence North-North-East through clearing to cairn No.625(2674 ft.) on the top of a hill, number and M.S.K. engraved on living rock; thence North-North-West

30

and across three watercourses to cairn No.638 (2315 ft) on the precipitous edge of a spur; thence North-West down clearing across the Nadugina Halla to cairn No.639 on its right bank, number and M.S.K. engraved on living rock; thence in the same direction up through clearing to cairn No.640; thence West-North-West down through clearing, across two watercourses and up to cairn No.641; thence North-North-West through clearing to cairn No.642 on a knoll; thence West-North-West down through clearing and across the Kade Halla to cairn No.643 on its right bank, number and M.S.K. engraved on living rock; thence in the same direction up through clearing to cairn No.644 (2263 ft) on a top, near the precipitous edge. Thence North-North-West partly through clearing and along grassy spur to cairn No.645 on a rise; thence in the same direction partly along grassy spur and through clearing to cairn No.646; thence North partly through clearing and partly along grassy spur to cairn No.647 at edge of jungle; thence East up along the grassy spur to cairn No.648 at edge of jungle; thence East-South-East along grassy spur to cairn No.649 on a precipitous rock, number and M.S.K. engraved on living rock; thence North-North-East up the grassy spur to cairn No.650 on a knoll; thence in the same direction up the grassy spur to cairn No.651 on the top of the Great Trigonometrical station of Bisalu Betta

(32

small watercourses to cairn No.665 (2611 ft) near Mysore survey mark; thence in the same direction through clearing to cairn No.666, number and M.S.K. engraved on living rock; thence North by a little East through clearing to cairn No.667; thence North-North-East through ~~the~~ clearing to cairn No.668; thence North down through clearing to cairn No.669; thence North-North-West through clearing to cairn No.670 near Mysore survey mark; thence North through clearing to cairn No.671 on the precipitous edge; thence North by a little East through clearing to cairn No.672 on the precipitous edge; thence East through clearing to cairn No.673 (2333 ft.); thence North by a little East through clearing to cairn No.674 on a hill top (2315 ft), number and M.S.K. engraved; thence North-North-West through clearing and along a rocky ridge to cairn No.675; thence West-North-West up through clearing to cairn No.676; thence North-North-West up through clearing to cairn No.677 on the Mudakumari Bare(2712 ft.) among Mysore survey marks, number and M.S.K. engraved on living rock; thence West through clearing and along ridge to cairn No.678 on a top; thence a little North of West through clearing and ridge to cairn No.679 on another hill top near Mysore survey marks where the Taluk Boundary separating Nagar from ~~TH~~ Thirthalli joins it.

to cairn No.692 on the right bank of a watercourse number and M.S.K. engraved on living rock; thence in the same direction through clearing and across a small watercourse to a Commissioners' cairn numbered 693 on the Northern side of the Melsunka foot-path, number and M.S.K. engraved on living rock; thence North-North-West through clearing, across four watercourses to cairn No.694; thence in the same direction, through clearing and across two small watercourses to cairn No.695; thence still in the same direction across two watercourses to cairn No.696 (2419 ft) on a hill top situated on the main ridge; thence North-West along the ridge and through clearing to cairn No.697 West of the Melsunka ghat foot path; thence West-North-West through clearing and along ridge to cairn No.698 on a rise near Mysore survey marks; thence West-South-West through clearing and along ridge to cairn No.699 on a hill top; thence North-North-West through clearing and along ridge to cairn No.700; thence North-West through clearing and along ridge to cairn No.701 near Mysore survey marks; thence South-West through clearing and along ridge to cairn No.702 near Mysore survey marks; thence West-North-West through clearing and along ridge to cairn No.703; thence North-West up throug clearing and along ridge to cairn No.704 on the top of Haddina Bare;

thence North by a little West through clearing and along ridge to cairn No.705 near Mysore survey marks; thence North-East down through clearing and along ridge to cairn No.706 near Mysore survey marks; thence North by a little East through clearing and along ridge to cairn No.707 on a knoll; thence in the same direction down through clearing and along ridge to cairn No.708 on a saddle; thence North-West through clearing and along ridge up to cairn No.709 (2699 ft.); thence in the same direction through clearing and along ridge to cairn No.710 (2510 ft.) on the top of Hullu gudda (2563 ft) amongst Mysore survey marks.

Thence the line, leaving the ridge goes North-North-West down through clearing, across a small watercourse to cairn No.711 on a hill side; thence in the same direction through clearing across a small watercourse to cairn No.712; thence in the same direction through clearing, across a large watercourse and a small watercourse to cairn No.713; thence still in the same direction through clearing, ~~and~~ across a large watercourse and up a spur to cairn No.714 near Mysore survey marks; thence North-East through clearing and along spur to cairn No.715 on a flat hill top near Mysore survey marks; thence East by a little North through clearing and along spur to cairn No.716 near Mysore survey marks; thence North-East through clearing and along spur to cairn No.717 (2549 ft) on a top near Mysore survey marks, number and [illegible]

engraved on living rock; thence North-North-West through clearing and along spur to cairn No.718 number and M.S.K. engraved; thence West-North-West through clearing and along spur to cairn No.719; thence North by a little West through clearing and along spur to cairn No.720 on the top of Ganapathi gudda (2524 ft) amongst Mysore survey marks; thence in the same direction through clearing to cairn No.721 amongst Mysore survey marks, number and M.S.K. engraved; thence North-North-East down through clearing to cairn No.722; thence in the same direction through clearing and across three watercourses to cairn No.723 on a spur, number and M.S.K. engraved on rock; thence still in the same direction through clearing across three small watercourses to a Commissioners' cairn numbered 724 below Haverikallu on the foot path connecting Hulubagilu(Mysore) with Tombattu (S.Kanara), number and M.S.K. engraved on living rock; thence East-South-East through clearing across three watercourses and along hill side to cairn No.725 near Mysore survey marks, number and M.S.K. engraved; thence in the same direction through clearing across a large watercourse and up along a spur to cairn No.726 below a hill top; thence East through clearing and along edge to cairn No.727; thence South-South-East through clearing and along edge to cairn No. ~~728~~ 728; thence a little South of East through clearing and

along edge to cairn No.729 on a hill top near Mysore survey marks; thence North-East down through clearing to cairn No.730, number and M.S.K. engraved on rock; thence North-North-East down through clearing across a watercourse to cairn No.731 on the left/of the Madlimane Halla, number and M.S.K. engraved; thence in the same direction through clearing across the said Halla up to cairn No.732 built round a tree on a spur; thence East-North-East through clearing and across a small watercourse to cairn No.733 near Mysore survey marks; thence North-North-East through clearing across four small watercourses to cairn No.734 near Mysore survey marks, number and M.S.K. engraved; thence North by a little West through clearing to cairn No.735 near Mysore survey marks, number and M.S.K. engraved; thence North through clearing and along edge to cairn No.736; thence North by a little East up through clearing across a watercourse to cairn No.737; near Mysore survey marks; thence North-East through clearing and along spur to cairn No.738 on hill top (2161 ft) near black rock among Mysore survey marks number and M.S.K. engraved.

The line then runs North-West down through clearing to cairn No.739 near Mysore survey marks, number and [illegible] engraved. Thence North-North-West down through clearing across a small watercourse and across the 'Kaggalla Halla' and up a spur to cairn No.[illegible] among small rocks; thence in the same direction through clearing and along

spur to cairn No.741 near large rock; thence in the same direction through clearing and along spur to cairn No. 742 on a hill top; thence West-North-West through clearing and along a narrow ridge to cairn No.743; thence in the same direction through clearing and along ridge to cairn No.744 on a hill top; thence still in the same direction through clearing to cairn No.745 (2113 ft) on another top; thence West through clearing and along ridge to cairn No.746 among Mysore survey marks; thence West-South-West down through clearing along edge and across three small watercourses to cairn No747; thence West-North-West through clearing, across a small watercourse and another watercourse to cairn No.748; thence North-North-West through clearing, along edge and across the 'Adakemarana Halla' to cairn No.749; thence North by a little East through clearing, along edge to cairn No.750; thence in the same direction through clearing and along edge to cairn No.751 (2064 ft); thence still in the same direction along edge to cairn No.752 below hill top (2064 ft).

The line then goes North-North-West down through clearing to cairn No.753, number and M.S.K. engraved; thence North-North-East through clearing and along edge (precipitous) across two watercourses to cairn No.754; thence in the same direction through

clearing and along edge across a water-
course and one small watercourse to cairn
No.755 on [illegible] rock overlooking [illegible]
precipitous edge No. and T.S.M. engraved
on rock; thence North-West down through
clearing and along edge to cairn No.756
among Mysore survey marks and about
chains South of the Ickigudde Hill;
thence North across the said Hill and
up through clearing to cairn No.[illegible] on a
spur near Mysore survey marks; thence
North by a little West through clearing
and up the spur to cairn No.758 near
Mysore survey marks, number and T.S.M.
engraved; thence North-West through
clearing and along spur and edge to
cairn No.759 near Mysore survey marks,
number and T.S.M. engraved on [illegible]
rock; thence West by a little North
through clearing across a fairly large
watercourse and a small watercourse to
cairn No.760 near Mysore survey marks;
thence South-West through clearing and
along edge to cairn No.761 below
Trigonometrical mark (1063); thence
West-North-West through clearing to
cairn No.762 number and T.S.M. engraved;
thence North-West by through clearing
and along edge to cairn No.763 near
Mysore survey marks; thence West through
clearing and along edge to cairn No.764;
thence in the same direction through
clearing, along edge, across two small
watercourses to cairn No.765 near Mysore
survey marks; thence North through clear-
ing and across a small watercourse to

40

cairn No.766 near Mysore survey marks; thence North-East up through clearing and along precipitous edge to cairn No.767; thence East by a little North through clearing across two small watercourses and a large watercourse to cairn No.768 near Mysore survey marks; thence North by a little East along spur and precipitous edge to cairn No.769 on black rock overlooking Varahi river among Mysore survey marks, number and M.S.K. engraved; thence East through clearing and across a watercourse to cairn No.770 among Mysore survey marks; thence North by a little East through clearing across a watercourse to cairn No.771 among Mysore survey marks; thence East by a little South through clearing to cairn No.772, number and M.S.K. engraved; thence East-South-East up through clearing across a small watercourse to cairn No.773 among Mysore survey marks; thence East-North-East through clearing to cairn No.774 near Mysore marks on main spur.

Thence the line goes North by a little East down through clearing to cairn No.775 on the left bank of the Varahi waterfall, number and M.S.K. engraved on rock below; thence North by a little West across the said waterfall to cairn No.776 on its right bank, number and M.S.K. engraved; thence North up through clearing to cairn No.777 among Mysore survey marks; thence

North-North-East up through clearing to cairn No.778 on a spur; thence North-North-West through clearing and along spur to cairn No.779; thence West by a little South through clearing to cairn No.780 near precipitous edge; thence North-West down through clearing to cairn No.781 on saddle; thence West through clearing to cairn No.782; thence West by a little South up through clearing to cairn No.783 on hill top (2013 ft), among Mysore survey marks; thence North-West-down through clearing and across a small watercourse to cairn No.784 on a spur; thence in the same direction through clearing and across a fairly large watercourse and a small watercourse to cairn No.785 on the left bank of the Hulikal Halla; thence West-North-West across the said Halla to cairn No.786 on its right bank, number and M.S.M. engraved; thence North up through clearing and along spur to cairn No.787 on hill top above Mysore survey marks; thence North by a little West through clearing and along spur to cairn No.788 on a hill top near Mysore survey marks; thence West through clearing to cairn No.789 on a hill top (2010 ft) among Mysore survey marks; thence North by a little West through clearing and along spur to cairn No.790 among Mysore survey marks; thence West-North-West through clearing and along spur to cairn No.791, number and M.S.M. engraved, thence in the same direction through clearing and along spur to cairn No.792 among Mysore survey marks;

thence South-West through clearing and along spur to cairn No.793 on a large rocky top near precipitous edge and among Mysore survey marks number and M.S.K. engraved; thence North-North-West through clearing and along spur to cairn No.794 among black rocks on a rise near Mysore survey marks, number and M.S.K. engraved; thence North through clearing and along spur to cairn No.795 on a top; thence North-West through clearing and along spur to cairn No.796 among Mysore survey marks; thence South-West through clearing and along spur to cairn No.797 among Mysore survey marks; thence West-South-West through clearing and along spur to cairn No.798 on hill top (2076 ft) Hyderghar fort; thence West by a little North/down through clearing and along spur to cairn No.799; thence West down through clearing across a small watercourse to cairn No.800; thence in the same direction down through clearing across a watercourse to cairn No.801, number and M.S.K. engraved on living rock; thence still in the same direction through clearing across two watercourses and past the Krishnappaya Bagilu to cairn No.802, near Mysore survey marks, number and M.S.K. engraved.

The line then goes North-North-West through clearing across a fairly large watercourse to a Commissioners' cairn, numbered 803 on flat ground; thence in the same direction through clearing across two small and two

along edge and across a watercourse to cairn No.816 near Mysore survey marks; thence North-East through clearing along edge and across two small watercourses to cairn No.817 near Mysore survey marks; thence North-North-East up through clearing and along a spur to cairn No.818 on edge below Trigonometrical hill station ~~Mulla~~ Mullu Gudda (2542 ft.) (Nishani Gudda) number and M.S.K. engraved.

Thence the line goes North-West down through clearing, along edge and across a watercourse to cairn No.819 (2299 ft.); thence in the same direction through clearing, along spur and edge past Mysore survey marks to cairn No.820, number and M.S.K. engraved on living rock; thence West-North-West through clearing along edge to cairn No.821, Number and M.S.K. engraved; thence West by a little South through clearing across two watercourses along spur and precipitous edge to cairn No.822; thence West-South-West through clearing along spur and precipitous edge to cairn No.823 on Murabbi Gudda; thence West-North-West through clearing and along edge across a small watercourse to cairn No.824; thence North-West down through clearing across a watercourse and along edge to cairn No.825; thence North down through clearing across a watercourse to cairn No.826 on the left bank of a watercourse; thence North-West across the said watercourse, through

thence North-West through clearing and along precipitous edge across three watercourses to cairn No.840; thence in the same direction through clearing and along precipitous edge to a Commissioners' cairn numbered 841 amongst Mysore survey marks at the top of a grassy spur overlooking the Kanara village of 'Guddemane'; thence West along grass and partly through clearing across a watercourse to cairn No.842; thence in the same direction along precipitous edge to cairn No.843 at end of grassy spur known as Boli Gudda (2114 ft.) number and M.S.K. engraved on living rock. Thence West-North-West down through clearing along edge across a watercourse to cairn No.844 on a spur; thence in the same direction down through clearing, across three watercourses to cairn No.845; thence West through clearing across two small watercourses partly along edge and main spur up to cairn No.846 on hill top called Nimbasale gudda (1898 ft); thence North-North-West through clearing and along spur to cairn No.847; thence North down through clearing and along spur to cairn No.848; thence West down through clearing and along spur to cairn No.849, number and M.S.K. engraved on living rock; thence in the same direction down through clearing and along spur to cairn No.850; thence North-North-West down through clearing and along spur to cairn No.851; thence

direction through clearing and along ridge to cairn No.863 on a top; thence in the same direction through clearing and along ridge to cairn No.864; thence still in the same direction through clearing and along ridge to cairn No.865 on hill top (2545 ft).

Thence leaving the ridge the line goes West-North-West through clearing and along spur to cairn No.866 among Mysore survey marks, number and M.S.K. engraved on living rock; thence North-North-East through clearing and along spur to cairn No.867, number and M.S.K. engraved; thence North through clearing and along spur to cairn No.868 among Mysore survey marks, number and M.S.K. engraved; thence North-North-West down through clearing and along spur to cairn No.869; thence in the same direction through clearing and along spur to cairn No.870 among Mysore survey marks; thence North-West through clearing and along spur to cairn No.871 on a rise(1993 ft); thence in the same direction down through clearing and along spur to cairn No.872; thence West-North-West down through clearing and along spur for about 19 chains and thence North for about seven chains to cairn No.873 among Mysore survey marks; thence North-North-West down through clearing and along spur, across a watercourse to cairn No.874 on its right bank, number and M.S.K. engraved; thence in the

graved; thence North up the grassy spur to cairn No.889 on a black rock; thence North by a little East up the grassy spur to cairn No.890 (2673 ft) on a hill top (2690 ft.); thence North by a little West along the grassy ridge to cairn No.891 on saddle; thence North along grassy ridge to cairn No.892 (2718 ft); thence North-West along grassy ridge to cairn No.893 on a rise; thence North-North-East along grassy ridge to cairn No.894 on Southern end of a rocky peak known as Koragara Kote (3064 ft), number and M.S.K. engraved on living rock; thence North-North-West along rocky peak to a Commissioners' cairn numbered 895 at the trijunction of Kattinahole, Holapur and South Kanara, number and M.S.K. engraved; thence in the same direction down the rocky ridge to cairn No.896 number and M.S.K. engraved; thence North-North-East down the grassy ridge to cairn No.897; thence in the same direction still down the grassy ridge to cairn No.898 (2802 ft) on a knoll among Mysore survey marks, number and M.S.K. engraved.

The line now <u>leaving the ridge</u> goes in a North-North-Westerly direction across a watercourse, partly through clearing to cairn No.899 on a precipitous rock among Mysore survey marks, number and M.S.K. engraved; thence in the same direction along grass, partly through clearing, across a watercourse to cairn No.900 among

Thence the line leaving the water - shed goes South-South-West down the grassy ridge and through clearing to cairn No.913 on a grassy knoll; thence South-West down grassy ridge and through clearing to cairn No.914; thence South - South-West down and up through clearing to cairn No.915 on a large black rock Number and M.S.K. engraved; thence South up through clearing to cairn No.916 among Mysore survey marks on the North- end of Venkataramma Durga; thence East South-East up along grassy ridge to cairn No.917 on a hill top (4121 ft) called Venkataramma Durga; thence South-West down grassy ridge, past Mysore survey marks to cairn No.918 on saddle; thence West by a little South along grassy ridge up to cairn No.919 on a hill top; thence South-West along grassy ridge and skirting jungle to cairn No.920 (4208 ft); thence West along grassy ridge to cairn No.921; thence West by a little North along the precipitous edge to cairn No.922 (both cairns inter-visible) situated on the edge, about 50 links South of the stone 'mantap' number and M.S.K. engraved on living rock; thence North-West along precipit- ous edge and grassy ridge to cairn No.923 near edge of jungle number and M.S.K. engraved; thence South-South-West down grassy ridge to cairn No.924 (both cairns inter-visible) number and M.S.K. engraved; thence West up the

No.937; thence North-North-West through clearing along spur to cairn No.938; thence in the same direction through clearing, down spur across the Mina Hole below small waterfall up to cairn No.939 on a spur; thence in the same direction through clearing, across two watercourses up to cairn No.940 (2055 ft.) at Southern end of tongue of land; thence still in the same direction through clearing to cairn No.941 —— Northern end of tongue of land; thence North-West down through clearing to cairn No.942 (1901 ft.) on the left bank of a watercourse; thence in the same direction through clearing across the said watercourse, along edge of ghats, across three small watercourses to a Commissioners' cairn numbered 943 (2016 ft.) at top grassy Knoll overlooking the Kanara village of Bachedi; thence North-North-West through clearing across a watercourse to cairn No.944; thence West-North-West through clearing across a small watercourse and up a spur to cairn No.945; thence North-North-West through clearing along spur to cairn No.946; thence West-North-West through clearing and up a spur to cairn No.947; thence North-North-East through clearing to cairn No.948 about two chains away number and M.S.K. engraved; thence North-West through clearing across a small watercourse to cairn No.949 (2204 ft.); thence West-North-West through clearing and up a spur

watercourse to cairn No.961 between the bastions of an old fort; thence West-North-West through clearing across a small watercourse up to cairn No.962 (2196 ft) on the watershed; thence North-North-West through clearing along watershed to cairn No.963; thence North by a little East through clearing along watershed to cairn No.964 about a chain South of a cluster of white rocks; thence West-North-West through clearing to cairn No.965 about the same distance North of white rocks; thence North-West through clearing along watershed to cairn No.966(2050 ft); thence West through clearing along watershed across a foot path to cairn No.967; thence West by a little North through clearing along Watershed to cairn No.968(near precipitous edge overlooking the Kollur ghat road), number and M.S.K. engraved; thence West up along grassy watershed to cairn No.969 among Mysore survey marks; thence West-North-West up along grassy watershed to cairn No.970 (2584 ft) among Mysore survey marks near precipitous edge, number and M.S.K. engraved; thence in the same direction along precipitous edge (also watershed) to cairn No.971; thence in the same direction along precipitous edge (also watershed) to cairn No.972 among Mysore survey marks; thence North-West along precipitous edge (also watershed)

to cairn No.985 among Mysore survey marks; thence in the same direction through clearing along precipitous edge also (water shed)
edge (also watershed) to cairn No.986 number and M.S.K. engraved; thence West-North-West through clearing along precipitous edge (also watershed) to cairn No.987; thence West through clearing along precipitous edge to cairn No.988 on a knoll at edge of jungle; thence West-South-West through clearing along precipitous edge (also watershed) up to cairn No.989 on a grassy knoll; thence West along grass covered watershed to cairn No.990 on hill top (2889 ft) among Mysore survey marks forming the junction of the Mysore villages of Kodanwalli and Marati.

The line now leaving the watershed goes South-West down a grassy spur to cairn No.991; thence South partly along grass and through clearing across a watercourse and up a grassy spur to cairn No.992 near precipitous edge overlooking the village of Hallibera (Kanara); thence West by a little South through grass along precipitous edge rounding the hill known as Golagodukun Bare to a Commissioners' cairn numbered 993 (2693 ft) at its Southern extremity; thence West-North-West through grass along precipitous edge still rounding the hill to cairn No.994, number and M.S.K. engraved; thence North partly through grass and clearing to cairn No.995 number and M.S.K. engraved; thence North by a little West up

along watershed to cairn No.1008 (3075 ft); thence South-South-West through grass down watershed for about five chains and then West still down watershed to cairn No.1009 on saddle about a chain South of the above mentioned foot path; thence West through grass along watershed to cairn No.1010 (2969 ft) among Mysore survey marks; thence West-North-West through grass along watershed to cairn No.1011; thence in the direction across the same foot path through grass along watershed to cairn No.1012 among Mysore survey marks; thence West-South-West through grass along watershed to cairn No.1013 (3046 ft.); thence-South-South-West through grass up watershed across the said foot path to cairn No.1014 number and M.S.K. engraved; thence West-South-West through grass up watershed across the foot path to cairn No. 1015; thence in the same direction through grass up watershed to Commissioners' cairn numbered 1016 on hill top (3325 ft) called Shedi Gudda among Mysore survey marks; thence West by a little South through grass down watershed to cairn No.1017; thence South-West through grass along watershed to cairn No.1018, thence South by a little East through grass along watershed to cairn No.1019, East of the said foot path; thence West-South-West through grass along watershed to a Commissioners cairn numbered 1020 (3174 ft) among Mysore survey marks and to the West of

61

grass up watershed to a Commissioners' cairn numbered1035 at the Southern extremity of Devarkonda Hill; thence West-South-West down ridge partly through clearing to another Commissioners' cairn numbered 1036 built amongst black rocks, number and M.S.K. engraved; thence South-South-West through grass down watershed past three black rocks to cairn No.1037; thence West by a little North through grass along watershed to cairn No.1038 built amongst black rocks and about two chains from head of clearing, number and M.S.K. engraved; thence South-West through clearing along watershed to cairn No.1039 (3105 ft) built at top of sheet of black rocks, number and M.S.K. engraved; thence West down black rocks along watershed to cairn No.1040 at head of clearing, number and M.S.K. engraved.

The line then goes West by a little South through clearing down watershed to cairn No.1041; thence South-West through clearing along watershed to cairn No.1042 on black sheet of rock, number and M.S.K. engraved thereon; thence West through clearing along watershed to cairn No.1043, number and M.S.K. engraved; thence in the same direction through clearing down watershed to cairn No.1044 thence West by a little South through clearing down watershed to cairn No.1045; thence South-South-West

precipitous edge of ghats (also water-shed) to cairn No.1062; thence North-East down through clearing along precipitous edge to cairn No.1063; thence North-North-West through clearing down watershed and precipitous edg to cairn No.1064; thence North-North-East through clearing along precipitou edge (also watershed) to cairn No.1065 on rocks number and M.S.K. engraved; thence North-West through clearing along precipitous edge to cairn No.106 (2887 ft).

The line then goes East through clearing along precipitous edge (also watershed) to cairn No.1067; thence East by a little North through clearing along precipitous edge and watershed to cairn No.1068; thence North by a little East through clearing along watershed to cairn No.1069; thence West through clearing and watershed to cairn No.1070 on precipitous edge; thence North by a little East through clearing along watershed to cairn No.1071; thence in the same direction through clearing down watershed and precipitous edge to cairn No.1072; thence North by a little West through clearing down watershed to cairn No.1073; thence North-West through clearing down precipitous edge and watershed to cairn No.1074; thence North-North-West through clearing along precipitous edge and watershed to cairn No.1075

and precipitous edge to cairn No.1089 on black rock; thence North-West through clearing up precipitous edge(also watershed) to cairn No.1090; thence North through clearing up watershed to cairn No.1091 on the Trigonometrical station on the top of Chalkin Bare (3020 ft) among Mysore survey marks.

The line then leaving the watershed goes West-South-West through clearing down spur and edge of ghauts to cairn No.1092 number and M.S.K. engraved; thence South by a little West through clearing along spur and edge to cairn No.1093; thence West by a little South through clearing along spur and edge to cairn No.1094; thence South West through clearing along spur and edge to cairn No.1095 on a hill top (3003 ft) (Devakare gudda); thence West by a little North through clearing along spur and edge to cairn No.1096 number and M.S.K. engraved; thence West through clearing down spur and edge to cairn No.1097; thence West-North-West through clearing along spur and edge to cairn No.1098 number and M.S.K. engraved; thence North-West through clearing along spur to cairn No.1099, number and M.S.K. engraved; thence West-North-West through clearing down spur to cairn No.1100 on precipitous edge near black rocks, number and M.S.K. engraved; thence West by a little North through clearing along precipitous edge to cairn No.1101; thence South-West down grassy spur to cairn No.1102 among Mysore survey

67

through clearing partly along the ghaut road across a watercourse to cairn No.1115; thence in the same direction through clearing across a watercourse to cairn No.1116 among Mysore survey marks; thence still in the same direction through clearing across a small watercourse past Mysore survey marks to cairn No.1117(1827 ft) on the side of the road; thence East by a little South partly along road through clearing, across a small watercourse and a fairly large watercourse to cairn No.1118 near a tree amongst Mysore survey marks; thence in the same direction through clearing, generally following the road, across a fairly large watercourse and two small ones to cairn No.1119; thence East-North-East through clearing across two small watercourses and along the road to Commissioners' cairn numbered 1120 (1808 ft) on the grassy slope above the junction to Karni ghaut road with the foot path leading to Paḍubidu; ~~(Paḍubeedu)~~; thence North-East partly through grass and clearing across two watercourses to another Commissioners' cairn numbered 1121 on an open piece of grass land called Cowle Bidiki among Mysore survey marks; thence North by a little West through grass and then clearing across the Paḍubeedu foot path to cairn No.1122; thence in the same direction down through clearing partly along and across a small watercourse to cairn No.1123 near the

edge past two Mysore survey marks, across a watercourse to cairn No.1136, thence in the same direction through clearing along precipitous edge to cairn No.1137 number and M.S.K. engraved; thence West-North-West through clearing along edge across two watercourses to cairn No.1138; thence West by a little North up through clearing along edge to cairn No.1139; thence West through clearing along edge across two watercourses to cairn No.1140; thence West by a little South through clearing along edge across a small watercourse to cairn No.1141(1814 ft); thence in the same direction through clearing across another small watercourse to cairn No.1142; thence North-West partly through clearing and grass to cairn No.1143 at head of another clearing; thence West through clearing along edge across a small watercourse to cairn No.1144 on the right bank of the said watercourse; thence West-North-West partly through clearing and grass to cairn No.1145 (1891 ft); thence in the same direction along grass to cairn No.1146 among Mysore survey marks, number and M.S.K. engraved; thence North-West along grass to Commissioners' cairn numbered 1147 (1901 ft) on Kalgatta (Kallukatte) and situated South and West of foot path connecting Chagatkal (Kanara) with Padubeedu (Mysore).

The line then goes North by a little Easterly direction through grass and

then clearing along spur to cairn No.1148 (1969 ft) number and M.S.K. engraved; thence North by a little West through clearing along spur to cairn No.1149, number and M.S.K. engraved; thence West by a little North through clearing down spur to cairn No.1150 on the left bank of a small watercourse; thence East by a little North across the said watercourse through clearing to cairn No.1151 on another spur; thence West-North-West through clearing along spur and edge to cairn No.1152 (1768 ft); thence North-North-East through clearing along edge across a small watercourse to cairn No.1153; thence North-East through clearing along edge across a small watercourse to cairn No.1154 among Mysore survey marks; thence North-West through clearing across the Kesahallidodda Abbi Halla and up through clearing to cairn No.1155; thence west-North-West through clearing along edge to cairn No.1156; thence in the same direction through clearing along edge to cairn No.1157 (1754 ft); thence in the same direction through clearing along edge across a watercourse to cairn No.1158, number and M.S.K. engraved on living rock; thence in the same direction through clearing along edge and spur to cairn No.1159; thence in the same direction through clearing along edge and spur to cairn No.1160 (1868 ft); thence still in the same direction through clearing along spur and edge across a watercourse to cairn No.1161; thence West through clearing across a

fairly large watercourse to cairn No.1162 (1830 ft); thence North-West up through clearing along precipitous edge and spur to cairn No.1163, number and M.S.K. engraved; thence in the same direction up through clearing along spur and precipitous edge to cairn No.1164; thence West-North-West up through clearing along spur and precipitous edge to cairn No.1165; thence West by a little North up through clearing and along spur and precipitous edge to cairn No.1166 (2051 ft) among Mysore survey marks; thence North-West through clearing along edge to cairn No.1167; thence North-North-West through clearing along edge and spur to cairn No.1168 number and M.S.K. engraved; thence North by a little West up through clearing to cairn No.1169; thence North-North-East up through clearing to cairn No.1170, number and M.S.K. engraved; thence North-North-West up through clearing to cairn No.1171 on a hill top(2426 ft), number and M.S.K. engraved; thence North-West through clearing along spur and precipitous edge to cairn No.1172; thence in the same direction through clearing along spur and precipitous edge to cairn No.1173; thence still in the same direction through clearing along spur to cairn No.1174; thence North-North-West through clearing along spur to cairn No.1175(2492 ft.) thence West by a little North through clearing down spur to cairn No.1176; thence North-West down through clearing along spur

and precipitous edge to cairn No.1177;
thence in the same direction through
clearing up spur to cairn No.1178; thence
North-North-West through clearing up
spur to cairn No.1179, number and M.S.K.
engraved; thence in the same direction
through clearing up spur to cairn
No.1180 on Yedumalai Cudda (2766 ft)
among Mysore survey marks forming the
trijunction of Bombay, Madras and
Mysore, number and M.S.K. engraved on
living rock.

K.A. Narasimha Aiyangar.
Asst. Comr. on Spl. Duty.
8.6.28

Descriptive Memorandum of the Hannar Magane.

Commencing from Dodda Bare (2764 ft) also called Halumane Hill on which there is a cairn numbered 1 among Mysore survey marks forming the trijunction of the Sagar and Nagar Taluks of Mysore and the Hannar Magane of Coondapoor (S. Kanara) the line goes a little E.S.E. down a grassy spur across a small water course and up another grassy spur to cairn No.2 (2626 feet) on a ridge; thence N.N.E. up the grassy ridge to cairn No.3, No & M.S.K. engraved; thence E.N.E. up the grassy ridge to cairn No.4 among black rocks No. & M.S.K. engraved; thence E.S.E up the rocky ridge to cairn No.5 on a hill top ((2935 ft.) among Mysore survey marks; thence in the same direction down the grassy ridge to cairn No.6, No. & M.S.K. engraved; thence E. by a little N. along the grassy ridge to cairn No.7 on a hill top (2843 ft), thence in the same direction along the grassy ridge to cairn No.8 on another hill top; thence N.E. along the grassy ridge to cairn No.9 on Manjugal Bare (2778 ft.) No. & M.S.K. engraved; thence N. down a grassy spur to cairn No.10 at the head of a clearing, No. & M.S.K. engraved; thence N. by a little west through clearing down ~~the~~ spur to cairn No. 11, No. & M.S.K. engraved; thence N.N.E. through clearing along spur to cairn No.12 (2311 ft.) on a low jungle hill top.

The line then goes N. by a little E. ~~xxxxxxxxxx~~ through clearing down the spur to cairn No.13; thence N.E. through clearing down spur to cairn No.14; thence N. by a little E. through clearing and grass along

along spur to cairn No.15 on a hill top (2138 ft.) built round a tree; thence in the samedirection through clearing along spur to cairn No.16; thence N. by a little W. through clearing to cairn No.17 (2088 ft.) among Mysore survey marks; thence E. by a little S. through clearing down a minor spur to cairn No.18; thence in the same direction through clearing along southern edge of spur across a small watercourse to cairn No.19; thence in the same direction still down southern edge of spur through clearing across the junction of two small watercourses to cairn No.20 on the right bank; thence still in the same direction through clearing across a bridle path to cairn No.21 (1924 ft) on a flat laterite rock, No. & M.S.K. engraved; thence E.S.E. through clearing across a village cart track joining Markutka (Kanara) with Belhaklu (Mysore) and two small watercourses to cairn No. 22 at the bend of the Markutka stream, and on its left bank.

Thence the said stream froms the boundary as far as the junction of the Ganjala and Manjagalali streams; thence up a spur between the two aforementioned streams to cairn No. 23 (1954 ft.) among Mysore survey marks; thence E by a little south through grass to cairn No.24 (1997 ft.) on the southern end of a low knoll; thence in the same direction along grass across four small watercourses and a mule path to cairn No.25 (2047 ft) among Mysore survey marks below Kanemakki Gudda; thence E.N.E. through grass down spur to cairn No.26 (1941 ft.) near a Mysore survey mark at the end of spur above the junction of 2 paths and also along the junction of the Nittoor (Kanara) cultivation & Kumbli (Mysore) cultivation;

thence in the same dir ction across a water-course and along a village track for a short distance and up the opposite spur to cairn No. 27 (2079 ft.) No. & M.S.K. engraved; thence N.E. through grass along spur to cairn No.28 on saddle between two foot-paths; thence in the same direction through grass up spur to cairn No.29 (2109 ft.) on a knoll among Mysore survey marks; thence E.S.E. down grassy spur across the cart track to cairn No.30 to East of it; thence E.N.E. through grass and shrub up spur to cairn No.31 on a knoll; thence in the same direction along grassy spur to cairn No.32; [illegible] thence E.S.E. up grassy spur to cairn No.33 (2173 ft.) among Mysore Survey marks; thence S.E. along grassy spur across a foot-path up to cairn No.34 (2286 ft.) on Nidgod hill, among Mysore survey marks, forming the trijunction of Nittoor (Kanara); Malekoppa (Kanara) and Nidgod (Mysore); thence S.S.W. down grassy spur to cairn No.35; (2230 ft.), thence S. down grassy spur to cairn No.36 on a saddle among Mysore survey marks; thence in the same direction down grassy spur to cairn No.37 (2231 ft.) among Mysore survey marks; thence S.E.down grassy spur to cairn No.38 (2116 ft.) among Mysore survey marks; thence in the same direct on down grassy spur to cairn No.39 at the end of spur and above precipitous drop; thence in the same direction to cairn No.40 on a stream immediately below drop in areca garden.

Thence the said stream forms the boundary as far as cairn No.41 on its right bank; thence S.S.W. leaving the stream the line follows the division of the Hosahalli Malekoppa (Kanara)

and Manjagalali Malekoppa (Mysore) areca gardens to cairn No.42 on the left bank of another stream; thence in thesame direction across the said stream to cairn No. 43 on its right bank; thence E.S.E. skirting the Hosahalli Malekoppa (Manara) garden to cairn No.44 between a"sampige"and jack tree; thence N. by a little E. for about 18 links to cairn No.45; thence N.E. along the eastern edge of the afore mentioned garden to cairn N 46; thence the line goes S. by a little W. for about 146 links to Mysore and Madras survey stones near a mango tree; thence S.E. for about 310 links to cairn No.47 near a Mysore survey stone; thence N.N.E. for about 165 links to cairn No.48 near a Madras and Mysore survey stones on the right bank of a stream.

Thence the said stream forms the boundary as far as cairn No.49 (1919 ft.) on the left bank of a channel and to the north of a cart-track near a Mysore survey mark; thence N.E. through clearing across the said cart track t cairn No.50 on the left bank of a small water course among Mysore survey marks; thence E. by a little N. through grass along a ditch to cairn No.51 at the end of the ditch; thence for about 78 links to cairn No.52 on saddle; thence east by a little south up the grassy spur to cairn No.53(2060 ft.) on a hill top among Mysore survey marks; thence S.E. down the grassy spur to cairn No.54 on a saddle an to the West of a foot-path; thence in the sa direction along grassy spur to cairn No.55 on another low saddle; thence still in the same direction up grassy spur to cairn No.56 among Mysore survey marks below hill top. The lin then goes N. by a little west by the side of

77

a hill to cairn No.57 on the spur at the commencement of a ditch; thence E.N.E.along spur and ditch to cairn No.58 on a knoll; thence in the same direction down grassy spur and ditch to cairn No.59 (1910 ft.) near Madras survey stone; thence N.N.E.through grass along ditch to cairn No.60 near Mysore Survey marks; thence in the same direction crossing a water course, between the Magale (Kanara) areca garden and Madodi (Mysore) cultivation to cairn No.61 on the right bank of a watercourse. Thence the said watercourse is the boundary as far as its junction with a large water course marked by Cairn No.62 on the left bank of a larger water-course; thence the latter watercourse is the boundary as far as its junction with the Lakshmipur or Benhatti Hole.

Thence the said Hole forms the boundary upto cairn No.63 on its left bank at its junction with a watercourse. The river then continues to form the eastern boundary of the Hannar Magane, dividing it from the Mysore villages of Adagodu, Hosnad, Madlodi, Kalasi and Baidur as far as the junction of the Nagar and Sagar Taluks, marked by cairn No.64 (1726 ft.) among Mysore Survey marks, on the left bank of the said river. The line then goes S.S up a grassy spur to cairn No.65 (1972 ft.), among Mysore survey marks on Waddar Gudda at its eastern end; thence W. by a little south through grass, along the top, to cairn No.66 among Mysore survey marks; thence S.W. through grass, across a small watercourse and cart track to cairn No.67 among Mysore survey marks;

marks; thence W.S.W. up through grass, across a foot-path to cairn No.68 among Mysore Survey marks forming the trijunction of Ambagadi (Kanara), Pura (Kanara) and Barve (Mysore); thenceS.W. through grass to cairn No.69 among Mysore Survey marks; thence W.S.W along spur, across a foot path, to cairn No.70 among Mysore survey marks; thence S.S.W. in a straight line, through grass, across a small watercourse, to cairn No.71, among Mysore Survey marks on the northern side of a hill top; thence in the same direction, through grass, to cairn No. 72; thence S.W. in a straight line, across a small watercourse and a foot-path, to cairn No. 73; thence W.S.W. up through grass, across a small water-course, to cairn No.74 among Mysore survey marks, forming the trijunction of Gantigamane (Kanara), Udichi (Kanara) and Barve (Mysore); thence in the same direction, through grass, to cairn No.75 on a saddle in the centre of a foot-path among Mysore survey marks; thence S.W. up through grass to cairn No.76 on the northern side of a hill top near edge of jungle among Mysore survey marks, forming the trijunction of Udichi (Kanara) Hebbige (Kanara) and Barve (Mysore); thence W.S.W. in a straight line through jungle to cairn No 77 among Mysore survey marks; thence W. by a little S. through grass, across a foot-path, up to cairn No.78 among Mysore survey marks; thence W.S.W. through grass up to cairn No. 79, on the top of Tariputtada Gudda (2340 ft.) among Mysore survey marks, forming the trijunction of Talgod (Mysore) Barve (Mysore) and Hebbige (Kanara); thence in the same direction through grass along spur to cairn No. 80, on a hill top, among Mysore survey marks;

thence S. by a little N. through grass to cairn No.81 (2335 ft.), on another hill top; thence S.W. along edge of spur, across a foot path, to cairn No.82, among Mysore survey mark at the commencement of clearing. The line then goes S.W. through clearing along spur to cairn No.83 (2312 ft.) on a knoll; then W.S.W. through clearing, along spur, to cairn No.84; thence W. through clearing, along spur to cairn No.85 (2341 ft.) on another knoll; thence W.S.W. through clearing, along spur, to cairn No.86, on the top of Chapina Kumari Gudd (2459 ft.), among Mysore survey marks, forming the trijunction of Bailige (Kanara), Talgod (Mysore) and Mallur (Mysore).

The line, leaving the spur, goes S., down through clearing to cairn No.87; thence in the same direction, down through clearing, across two fairly large and one small water-course, to cairn No.88 (2076 ft.); thence S. by a little E., through clearing, across two small watercourses and one large water-course to cairn No.89 (1943 ft.) on a spur; thence S., through clearing, across the foot-path from Bailige (Kanara) to Kappandur (Mysore), to cairn No.90; thence, in the same direction, through clearing, across a fairly large water course, to cairn No.91 (1802 ft.) among Mysore survey marks, on the right bank of said water-course.

Thence the line goes 20° E. of S., straight through clearing, to cairn No.92; thence S.E. through clearing, to cairn No.93 (1778 ft.), on the left bank of the Neralamane Hole. Thence the said Hole is the boundary as far as cairn No.94 (1891 ft.), among Mysore Survey marks siguated on the left bank of the

Neralmane Hole and a small watercourse flowing into the said Hole from a westerly direction, and near the foot-path leading from Bailige (Kanara) to Changawalli (Mysore); thence S. by a little E., through clearing, across the said water course and two small watercourses, to cairn No 95; thence S.S.E., through clearing, across a small watercourse to cairn No.96 (2072 ft.), amor Mysore Survey marks; thence S.W., up through clearing, along ridge, to cairn No.97, on the eastern edge of Kermargudde (2207 ft.); thence W.S.W., through clearing, along ridge, across the foot-path connecting Markumbka (Kanara) with Chengawalli (Mysore), to cairn No.98 (2279 ft.) among Mysore Survey marks on Kormarakote; thence W., through gra along ridge, to cairn No.99; thence W.S.W., partly through grass and clearing, along ridge, accro a foot-path up to cairn No.100 (2325 ft.), No. & M.S.K. engraved; thence W.N.W., partly through grass and clearing, along ridge, across a foot path, to cairn No.101 (2389 ft.); thence W by a little north, partly through grass and clea ing, along ridge, to cairn No.102 (2404 ft.), No & M S.K. engraved; thence in the same directio down through clearing, along ridge, to cairn No. 103, among Mysore survey marks; thence W.N.W. through grass, along ridge, to cairn No.104; thence W. by a little south, partly through grass and clearing, along ridge, across a foot path, to c cairn No.105 (2344 ft.), on a knoll; thence west partly through grass and clearing, to cairn No. 106 (2498 ft.), on the top of Holegaru Gudda, among Mysore Survey marks; thence W.S.W. partly through grass and clearing to cairn No. 107 on a hill top (2536 ft.).

Thence

The line, now leaving the ridge, goes W.S.W, down a flattish spur, to cairn No.108, among Mysore Survey marks, forming the trijunction of Shankara Shanbogue (Mysore), Mallur (Mysore) and Nagodi (Kasara); thence S.S.W., down rocky spur, to cairn No.109 on a knoll (2364 ft.), No. & M.S.K. engraved; thence S. by a little E., through grass, along spur, to cairn No.110, built round a gooseberry tree, among Mysre Survey mark thence W. by a little S., through grass, along sp spur, to cairn No.111 on a knoll (2265 ft.), among Mysore Survey marks; thence S.W., down partly through grass and clearing, across the Nagodi Hole, to cairn No.112 (1945 ft.), among Mysore Survey marks, on the right bank of the said Hole; thence S.S.E. through grass, across a kx foot path, a small watercourse, and partly along the cart track from Kollur ghat road to Ikkibilalu, to cairn No.113, on the western side of the said cart track; thence in the same direction, partly through clearing and grass, along side of hill, to cairn No.114; thence still in the same direction, through grass, to cairn No.115; thence S. by a little W., along side of hill, through grass, to cairn No.116 (1951 ft among Mysore Survey marks, to the north of the afore mentioned cart track, and on the left bank of a small watercourse; thence E.S.E., straight across said watercourse and the Kollur ghat road, to cairn No.117 in the clearing, near Kodachadri State Forest sign-post, and Mysore Survey marks; thence in the same direction, up through clearing, to cairn No.118 among Mysore survey marks; thence in the same direction, straight up through clearing, to cairn No. 119; thence in the same direction, through clearing, across two watercourses, to cairn No.

No.120; thence in the same direction, up through clearing, across two small water-courses, to cairn No.121; thence in the same direction, up through clearing, to cairn No. 122; thence still in the same direction, partly through clearing and grass, to cairn No.123 on a hill top (2554 ft.) called Mensina Gudda, among Mysore survey marks, forming the trijunction of Karati (Mysore), Valur (Mysore) and Nagodi (Kanara); thence E.S.E., down grassy spur, to cairn No.124; thence in the same direction, through grass, along spur, to cairn No.125, at head of clearing; thence in the same direction, through clearing, along spur, to cairn No.126 No. & M.S.K. engraved; thence in the same direction, down through clearing, along spur, to cairn No.127; thence in the same direction, through clearing, down spur, to cairn No.128 on saddle; thence S.E., through clearing, along spur, to cairn No.129 (2182 ft.), on the western end of a low jungle top; thence east, through clearing, to cairn No.130, on the eastern end of the aforesaid hill top, No.& M.S.K. engraved; thence E. by a little S., through grass, down spur, to cairn No.131; thence S.E., through grass, across a footpath and two small watercourses, to cairn No.132 (1949 ft.), on the left bank of the Garte Hole.

Thence the said Hole is the boundary as far as cairn No.133, on the right bank of the said Hole, built on the large laterite rock, No. & M.S.K. engraved thereon. The line then goes ~~in a~~ S.E. partly through clearing and grass, up to cairn No.134 (2082 ft.), No. & M.S.K. engraved; thence in the same

direction, through grass, along Northern edge of spur, to cairn No.135; thence in the same direction, through grass, along Northern edge of spur to cairn No.136; thence in the same direction, up through clearing, to cairn No.137 on a spur; thence in the same direction up through clearing, along spur, to cairn No.138 at end of clearing; thence still in the same direction, up through grass, across a small watercourse to the cairn on the top of Dodda Bare (Halumane Hill), referred to at the commencement of the memorandum.

Note.

1. Whenever watershed is mentioned it refers to the main back-bone of the Western Ghauts.
2. When streams are said to form the boundary the mid stream is the actual boundary.
3. Commissioners' cairns refer to cairns built by the Boundary Commission of 1880-81.

R. Narasimha Ayyangar.
Asst. Comr. on spl. Duty
8.6.25

K. Sankara Rao
8.6.25.
Dy. Collector, Madras.

F. D. Morton. E.A.S.
Survey of India
8.6.25

ACTUAL HORIZONTAL DISTANCE OF MAIN FRONTIER LINE AS MEASURED FROM ORIGINAL 4-inch PLANE-TABLE SECTIONS.

SEASON 1924-25.

Sheet No.25.B

Cairn No.369 to 378	= 4.380 "		
" " 378 to 384	= 4.920		21.043 inches.
" " 384 to 391	= 5.608		
" " 391 to 396	= 5.115		
" " 396 to margin of sheet	= 1.020		

Sheet No. 23.

Margin of sheet to cairn No. 403	= 4.555		
Cairn No.403 to " " 410	= 4.675		
" No.410 to " " 416	= 4.170	36.961 "	
" No.416 to " " 426	= 5.975		
" No.426 to " " 434	= 5.000		
" No.434 to " " 442	= 7.020		
" No.442 to " " 447	= 5.566		

Sheet No.21

Cairn No.447 to " " 453	= 6.045		
" No.453 to " " 461	= 6.460		
" No.461 to " " 469	= 4.770		
" No.469 to " " 476	= 5.540	45.917 "	
" No.476 to " " 482	= 5.560		
" No.482 to " " 491	= 5.390		
" No.491 to " " 498	= 4.475		
" No;498 to " " 502	= 3.892		
" No.502 to " " 509	= 3.785		

Sheet No.19.

Cairn No.509 to " " 516	= 4.800		
" No.516 to " " 526	= 5.660		
" No.526 to " " 534	= 4.765		
" No.534 to " " 541	= 4.040		
" No.541 to " " 548	= 5.035	42.250 "	
" No.548 to " " 557	= 4.875		
" No.557 to " " 562	= 5.005		
" No.562 to " " 569	= 4.065		
" No.569 to " " 573)			
and beyond to margin of sheet.)	= 4.005		

Sheet No.17.

Margin of sheet to cairn No.580	= 5.590		
Cairn No.580 to " " 586	= 4.899		
" " 586 to " " 590	= 4.685		
" " 590 to " " 600	= 5.090		
" " 600 to " " 608	= 4.435	43.505 "	
" " 608 to " " 620	= 4.555		
" " 620 to " " 627	= 5.158		
" " 627 to " " 636	= 4.378		
" " 636 to " " 644)			
and margin.)	= 4.715		

Sheet No. 15.

Cairn No.644 and margin	to	cairn No.653	=	5.715	
" No.653	to	" " 662	=	5.265	
" No.662	to	" " 671	=	4.455	
" No.671	to	" " 679	=	4.758	
" No.679	to	" " 686	=	4.105	41.348 "
" No.686	to	" " 694	=	5.030	
" No.694	to	" " 700	=	4.075	
" No.700	to	" " 709	=	4.720	
" No.709	to	" " 713) and margin.	=	3.225	

Sheet No.13.

Cairn No.713 and margin	to	cairn No.725	=	5.635	
" No.725	to	" " 738	=	5.265	
" No.738	to	" " 746	=	4.640	
" No.746	to	" " 755	=	4.488	
" No.755	to	" " 770	=	4.704	46.873 "
" No.770	to	" " 785	=	5.375	
" No.785	to	" " 796	=	4.341	
" No.796	to	" " 803	=	4.470	
" No.803	to	" " 809	=	3.805	
" No.809	to	" " 816	=	4.150	

Sheet No.10.

South margin of sheet and cairn No.816	to	Cairn No.826	=	4.660	8.773"
Cairn No.826	to	" " 832	=	4.113	

Sheet No.9.

Cairn No.832	to	cairn No.841	=	4.965	
" No.841	to	" " 850	=	5.185	
" No.850	to	" " 856	=	4.225	
" No.856	to	bund across Chakra Nadi	=	4.105	33.445 "
Bund on river	to	cairn No.858	=	5.615	
Cairn No.858	to	" " 864	=	4.505	
" No.864	to	" " 872 and margin	=	4.845	

Sheet No.6.

Cairn No.872 and margin	to	cairn No.885	=	4.848	
" No.885	to	" " 894	=	4.385	
" No.894	to	" " 901	=	4.088	
" No.901	to	" " 908	=	4.978	
" No.908	to	" " 914	=	4.510	
" No.914	to	" " 926	=	4.660	39.955"
" No.926	to	" " 933	=	3.972	
" No.933	to	" " 943	=	4.506	
" No.943	to	" " 951	=	4.008	

Sheet No.5.

Cairn No.951	to	cairn No.964	=	4.168	

Sheet No.2.A.

Cairn No.964	to	cairn No.973	=	4.388	
" No.973	to	" No.984	=	4.505	
" No.984	to	" No.994	=	5.187	
" No.994	to	" No.1001	=	3.396	51.219 "

Sheet No;2.B.

Cairn No.1001	to	cairn No.1010	=	4.770	
" No.1010	to	" " 1022	=	5.560	
" No.1022	to	" " 1036	=	5.025	
" No.1036	to	" " 1050	=	4.520	
" No.1050	to	" " 1070	=	4.960	
" No.1070	to	" " 1089 on margin.	=	4.740	

Sheet No.1.

Cairn	No.1089	to	cairn	No.1107	=	4.478)	
"	" 1107	to	"	" 1120	=	4.790)	
"	" 1120	to	"	" 1130	=	3.748)	
"	" 1130	to	"	" 1148	=	5.300)	27.588 "
"	" 1148	to	"	" 1166	=	4.527)	
"	" 1166	to	"	" 1180	=	)	
	on Yadamalai h;s.				=	4.745)	

HONNAR MAGANE or COONDAPOOR ENCLAVE.

Sheet No.3.A.

Cairn	No.1	to	cairn	No.	10	= 4.957)	
"	No.10	to	"	"	20	= 4.958)	
"	No.20	to	"	"	26	= 4.430)	
"	No.26	to	"	"	37	= 5.020)	
"	No.86	to	"	"	93	= 4.550)	
"	No.93	to	"	"	97	= 4.290)	
"	No.97	to	"	"	100	= 3.260)	
"	No.100	to	"	"	104	= 3.810)	56.301 "
"	No.104	to	"	"	108	= 3.830)	
"	No.108	to	"	"	112	= 3.861)	
"	No.112	to	"	"	123	= 3.970)	
"	No.123	to	"	"	132	= 2.630)	
"	No.132	to	"	"	133	= 4.575)	
"	No.133	to	"	"	1	= 2.460)	

Sheet No. 3.B.

Cairn	No.37	to	cairn	No.	49	= 3.503)	
"	No.49	to	"	"	59	= 4.155)	
"	No.59	to	"	"	63	= 2.938)	
"	No.63	to	"	"	64	= 30.929)	
(Lakshmipur Hole)						)	
Cairn	No.64	to	cairn	No.	70	= 3.675)	55.009 "
"	No.70	to	"	"	76	= 4.220)	
"	No.76	to	"	"	81	= 2.595)	
"	No.81	to	"	"	86	= 2.994)	

Main Frontier line = 109.719 miles.

Honnar Magane = 27.903 "

137.622 Linear miles

Sd/ V.W.Morton, Extra Asstt. Supdt.

In charge Mysore South Kanara Boundary Setttlemen

Dt. 15- 6- 1925.

A.M.J.

87

App.F.VI-G1.] / B650

SUBJECT

Diary No. of letter replied to

General and Revenue Secretariat

( )

, the 192

Date of issue 6.11.25

Signed by Mr V. Acharya

4 to be sent with reply

This has to be typed as only one copy has been received. Two copies may be sent

Copied by

Examined by

Section 2A

File No. 57-24

Serial No. 66

No. R. 3076 Dy 6/11/25

Encl. Seven

To The Secretary of State

Sir,

I am directed to forward herewith a copy of the final report on the settlement of the Mysore South Canara boundary together with ~~copies~~ a copy of the descriptive memorandum by the Arbitrator and the representations of the Govts of Madras

over